




## LEDONG Machinery Co., Ltd.

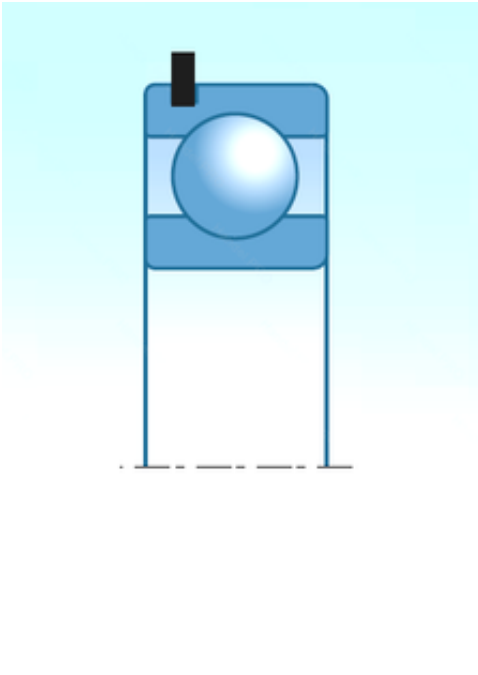

6806ZZNR Bearing 2D drawings and 3D CAD models

30,000 mm x 42,000 mm x 7,000 mm NTN  
6806ZZNR deep groove ball bearings

Bearing No. 6806ZZNR

Size	30x42x7 mm
Bore Diameter	30,000 mm
Outer Diameter	42,000 mm
Width	7,000 mm
d	30,000 mm
D	42,000 mm
B	7,000 mm
C	7,000 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359410754
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	30MM Bore; 42MM



## LEDONG Machinery Co., Ltd.

	Outside Diameter; 7MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Other Features	Deep Groove   With Snap Ring
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6806ZZNR
Weight / LBS	0.051
Outer Race Width	0.276 Inch   7 Millimeter
Bore	1.181 Inch   30 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outside Diameter	1.654 Inch   42 Millimeter
bore diameter:	30 mm
precision rating:	ISO Class 0
outside diameter:	42 mm
finish/coating:	Uncoated
overall width:	7 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	7 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	7 mm



## LEDONG Machinery Co., Ltd.

snap ring included:	With Snap Ring
maximum rpm (grease):	15000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	15000 RPM
dynamic load capacity:	4700 N
series:	68
static load capacity:	3650 N
manufacturer product page:	<a href="#">Click here</a>