




LEDONG Machinery Co., Ltd.

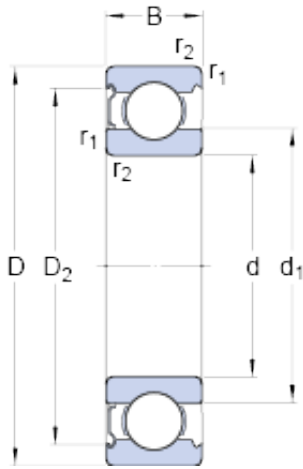

110 mm x 170 mm x 28 mm SKF 6022-Z deep groove ball bearings

Bearing No. 6022-Z

6022-Z Bearing 2D drawings and 3D CAD models

Size	170x110x28 mm
Bore Diameter	170 mm
Outer Diameter	110 mm
Width	28 mm
d	110 mm
D	170 mm
B	28 mm
d ₁	129.05 mm
D ₂	155.3 mm
r _{1,2} - min.	2 mm
d _a - min.	119 mm
d _a - max.	128.9 mm
D _a - max.	161 mm
r _a - max.	2 mm
Basic dynamic load rating - C	85.2 kN
Basic static load rating - C ₀	73.5 kN
Fatigue load limit - P _u	2.6 kN
Reference speed	8000 r/min
Limiting speed	5000 r/min
Calculation factor - k _r	0.025
Calculation factor - f ₀	15.6
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF



LEDONG Machinery Co., Ltd.

Minimum Buy Quantity	N/A
Weight / Kilogram	2.04
EAN	7316576621505
Product Group	B00308
Enclosure	1 Metal Shield
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	110MM Bore; 170MM Outside Diameter; 28MM Outer Race Diameter; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	6022 Z
Weight / LBS	4.47
Outside Diameter	6.693 Inch 170 Millimeter
Outer Race Width	1.102 Inch 28 Millimeter
Bore	4.331 Inch 110 Millimeter
bore diameter:	110 mm
static load capacity:	73.5 kN



LEDONG Machinery Co., Ltd.

outside diameter:	170 mm
precision rating:	ABEC 1 (ISO Class Normal)
overall width:	28 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Single Shield
outer ring width:	28 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	2 mm
internal clearance:	C0
maximum rpm:	4000 RPM
dynamic load capacity:	85.2 kN
series:	60
d_1	129.05 mm
D_2	155.3 mm
$r_{1,2}$ min.	2 mm
d_a min.	119 mm
d_a max.	128.9 mm
D_a max.	161 mm
r_a max.	2 mm
Basic dynamic load rating C	85.2 kN
Basic static load rating C_0	73.5 kN
Fatigue load limit P_u	2.6 kN
Calculation factor k_r	0.025
Calculation factor f_0	15.6
Mass bearing	2 kg