




LEDONG Machinery Co., Ltd.

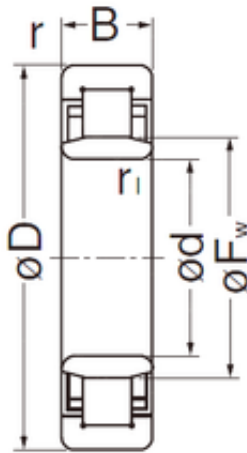

30 mm x 62 mm x 16 mm NACHI NU206EG cylindrical roller bearings

Bearing No. NU206EG

NU206EG Bearing 2D drawings and 3D CAD models

Size	30x62x16 mm
Bore Diameter	30 mm
Outer Diameter	62 mm
Width	16 mm
d	30 mm
Fw	37,5 mm
D	62 mm
B	16 mm
C	16 mm
r min.	1 mm
r1 min.	0,6 mm
Weight	0,21 Kg
Basic dynamic load rating (C)	39 kN
Basic static load rating (C0)	37,5 kN
(Grease) Lubrication Speed	9500 r/min
Enclosure	Open
Bore Type	Cylindrical Bore
Configuration	Single Row
Bore Size	30 mm
Outside Diameter	62 mm
Width	16 mm
Fillet Radius/Chamfer	1 mm
r1	0.6 mm
Dynamic Load Rating	39,000 N
Static Load Rating	37,500 N



LEDONG Machinery Co., Ltd.

Limiting Speed - Grease	9,500 rpm
Limiting Speed - Oil	12,000 rpm
Radial Clearance	0.020 to 0.045 mm
db (min)	35 mm
db (max)	37 mm
dc (min)	40 mm
dd (min)	44 mm
Da (max)	56 mm
ra (max)	1 mm
ra1 (max)	0.6 mm