




# LEDONG Machinery Co., Ltd.

## INA PASE25-N-FA125 bearing units

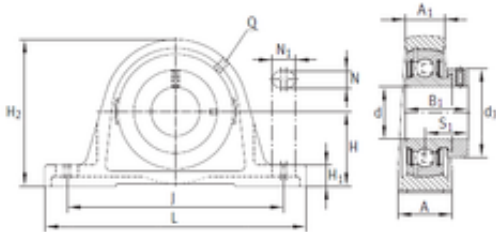

PASE25-N-FA125 Bearing 2D drawings and 3D CAD models

Bearing No. PASE25-N-FA125

Bore Diameter	25 mm
d	25 mm
S1	23,5 mm
Thread (Q)	Rp1/8
d3	37,5 mm
A	36 mm
A1	21 mm
B1	31 mm
H	36,5 mm
H1	14,5 mm
H2	70 mm
J	103 mm
L	130 mm
N	11 mm
N1	19 mm
Weight	0,7 Kg
Basic dynamic load rating (C)	14 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.766
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



## LEDONG Machinery Co., Ltd.

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GRAE25NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row   Spherical   Corrosion Resistant   Standard Shaft Height   With Set Screw
Long Description	2 Bolt Pillow Block; 25MM Bore; 36.5MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 95.275MM Minimum Bolt Spacing; 114.3MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Lip C
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	<a href="http://www.ina.com">http://www.ina.com</a>
Manufacturer Item Number	PASE25N-FA125
Weight / LBS	1.985
Bore	0.984 Inch   25 Millimeter
Base to Center Height	1.437 Inch   36.5 Millimeter
Bolt Spacing Minimum	3.751 Inch   95.275Millimeter
Length Thru Bore	1.22 Inch   31 Millimeter
Bolt Spacing Maximum	4.5 Inch   114.3Millimeter
Actual Bolt Center to	0 Inch   0Millimeter



## LEDONG Machinery Co., Ltd.

Center	
Nominal Bolt Center to Center	4.1 Inch   105 Millimeter